


PSA D44 1237
PSA D15 1343
NF EN ISO 868

08/12/2006

Group	1		
	1.3	2	

BTW *Wear and tear of floor covering*

Ref. : S167

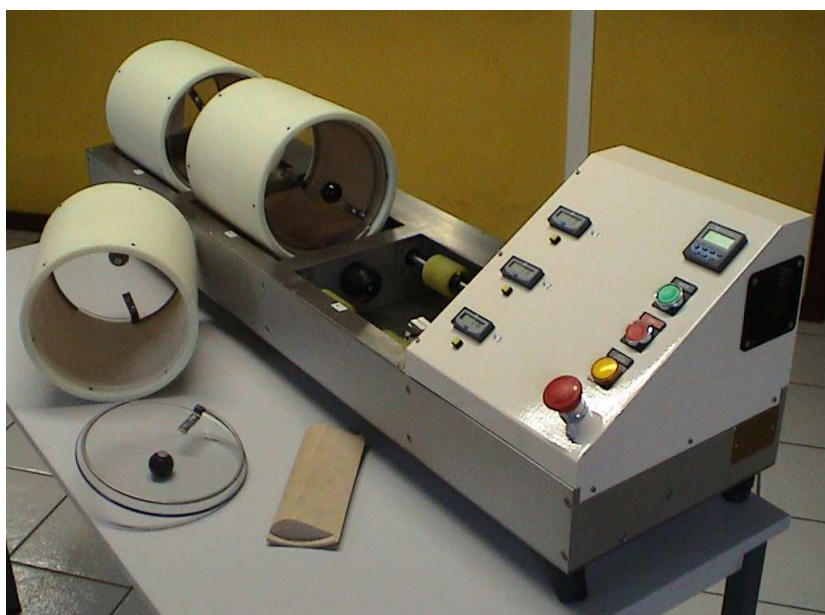

BTW 3 drums*

Principle

This instrument makes it possible to carry out tests of wear and tear on various types of materials like linings of car or carpets, etc

For devices equipped with 3 drums it is possible to carry out 3 tests simultaneously.

This instrument is available in a power-operated version with 1 or 3 test drums

Field

The test simulates the passage related to the use of the floor covering. This test is ideal for use in the testing of abrasion of

floor covering, fitted carpet, carpet or linings of car.

Main characteristics**:

Speed of tests:	50 min tr-1,
Preselector counter to program the number of cycle of tests	from 0 to 999 cycles,
Adding individual counters corresponding to each test chamber	3
Delivered with one tetrapod and one nosing can for the test chamber.	


Drum:

Internal diameter of each drum:	200 to 205 mm.
External diameter of each drum:	220 to 230 mm.
Functional depth of each drum:	195 to 200 mm.
Weight of each drum:	2600 to 3500 g.

Tetrapod:

- Weight of each tetrapod:	1 kg.
- Hardness of each tetrapod:	76 Shore A.

Power supply:	220 V/50 Hz single-phase current
---------------	----------------------------------

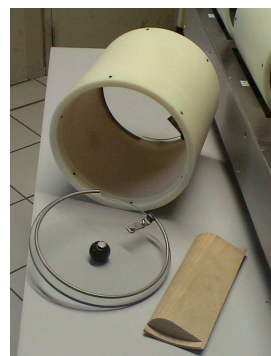

drum & edge of step*

*** Characteristics given as an estimate. We reserve ourselves the right to freely modify them with the aim of improving the performance of our test device.*

Sodemat

Z.A. la Pyramide
F-30380 ST CHRISTOL LEZ ALES
Tel: +33 (0)466 922 060
Fax: +33 (0)466 253 980
E-mail: contact@sodemat.net

Our representative::